


KLEANSEP™ ceramic membranes and modules

Data sheet

Historical ranges market leaders

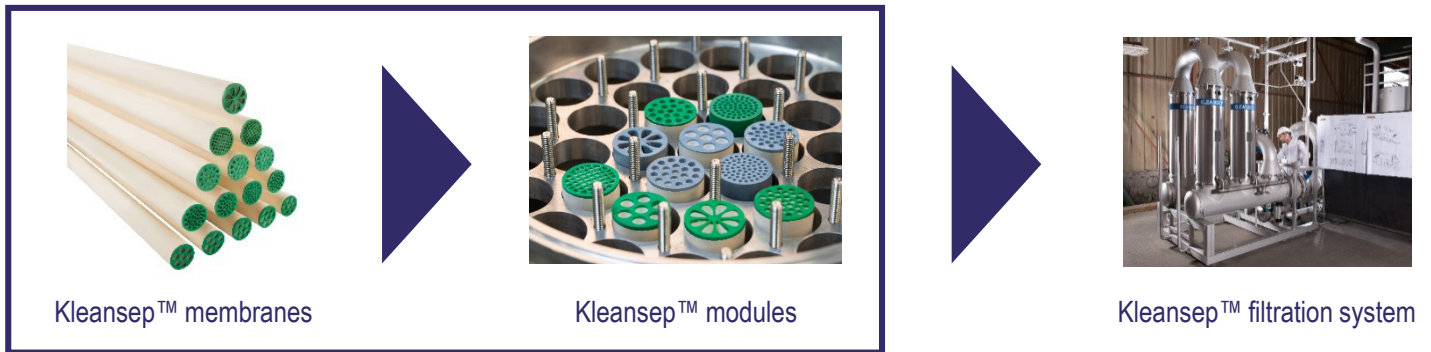

ALSYS ceramic membranes are tube-shaped filters with an asymmetrical membrane structure. With their unique design and construction, KLEANSEP™ products are well-suited to a wide range of applications.

ALSYS experiences in the field of ceramic membranes technology

Recycle Water and Liquids		Process	
Water	Oil & Gas	Chemistry	Feed & Food
Treatment of industrial, domestic waste water through cross-flow filtration technologies		Production of chemicals, pharmaceuticals, animal feed or human food ingredients through cross-flow filtration technologies	
Bioreactor treatment	Recycling of produced water	Bio-based formulations and materials	Industrial biotechnology by fermentation
Recycling of liquid resources	Treatment of oily water	Chemical and pharmaceutical processes	Filtration of sugar, starch derivatives and beverages

What makes KLEANSEP™ unique ?

- High temperatures resistance
- High mechanical resistance ceramic materials
- Compatible with extreme environments (including oxidizing agents, corrosive materials, and solvents)
- High oil and turbidity tolerance
- **Reliable filtration performance**
- Tubular module: flexible membrane surface area from 0,16 m²/module to 69 m²/module
- High durability module: housings available in a variety of materials, gaskets available in different types of elastomers

Reliable filtration performance

- Temperature up to 150°C
- Max. TransMembrane Pressure : 10 bar
- pH range : 0 – 14
- Membrane material: oxide-based ceramic
- Housing materials: steel (316L, 316Ti, Duplex, Super-duplex, Hastelloy ...), Fiber-glass (FRP) or Plastic (CPVC, ...)
- Gasket materials: NBR, EPDM, FPM, SILICONE

Kleansep™ membranes technical features

	Channels diameter (mm)	Membrane area (m ²)	Ceramic tube length (mm)	External diameter (mm)	Number of channels	Code
	6	0,16	1178 ± 0,5 mm	25 ± 0,5 mm	7	BX
	5	0,2	1178 ± 0,5 mm	25 ± 0,5 mm	8	BE
	4,5	0,2	1178 ± 0,5 mm	25 ± 0,5 mm	12	BD
	3,5	0,25	1178 ± 0,5 mm	25 ± 0,5 mm	19	BW
	2,8	0,34	1178 ± 0,5 mm	25 ± 0,5 mm	31	BH
	2,2	0,5	1178 ± 0,5 mm	25 ± 0,5 mm	52	BC
	2	0,45	1178 ± 0,5 mm	25 ± 0,5 mm	61	BS

General features

Geometry:	Multichannel tubular
Support material:	Oxide-based ceramic
Membrane material:	Oxide-based ceramic
End sealing:	1 mm or 16 mm

Thermal and chemical resistance

Maximum Temperature :	Up to 150°C
Sterilization :	121°C
Sterilization by oxidizing agents :	yes

Membranes pore size and cut-off

Microfiltration:	1,0µm 0,8µm 0,45µm 0,2µm 0,1µm HR
Ultrafiltration:	300 kD HF, 150 kD, 50 kD, 15 kD, 8 kD
Nanofiltration*:	5 kD, 1 kD

* Nanofiltration product are shaped with 19, 31 & 61 channel geometries

Mechanical and chemical resistance

Maximum TransMembrane Pressure:	10 bar
Bursting pressure:	80 bar
pH range:	0 to 14
Unaffected by solvents and radiation	

Kleansep™ modules technical features

MODULES GEOMETRY		Membrane area per module depending on the membranes (m ²)						
Number of membranes	Modules Code	BX	BE	BD	BW	BH	BC	BS
		7	8	12	19	31	52	61
1 membrane	Module K01	0,16	0,2	0,2	0,25	0,34	0,5	0,45
3 membranes	Module K03	0,48	0,6	0,6	0,75	1,02	1,5	1,35
7 membranes	Module K07	1,12	1,4	1,4	1,75	2,38	3,5	3,15
19 membranes	Module K19	3,04	3,8	3,8	4,75	6,46	9,5	8,55
37 membranes	Module K37	5,92	7,4	7,4	9,25	12,58	18,5	16,65
67 membranes	Module K67	10,72	13,4	13,4	16,75	24,48	33,5	30,15
99 membranes	Module K99	15,84	19,8	19,8	24,75	33,66	49,5	44,55
138 membranes	Module K138	22,08	27,6	27,6	34,5	46,92	69	62,1

Housing general features

Steel type:	<ul style="list-style-type: none"> Inox 316L Inox 316Ti Titanium Uranus B6 (904L) Hastelloy C22 Hastelloy C276
Connection type:	<ul style="list-style-type: none"> Clamp Flange (ISO,ANSI or DIN)

Gaskets general features

Gaskets type:	<ul style="list-style-type: none"> Single gasket / module Individual gasket / membrane
Gaskets elastomer materials:	<ul style="list-style-type: none"> NBR EPDM FPM SILICONE

Contacts ☎:

Europe: +33 (0)4 66 85 95 36
 North America: +1 857 504 2250
 Asia: +86 (0)21 6350 3377